

Type:	VLC __ (__ =50,100,250,500,1000,1500)
eDMX	≤ __ *512 channels
Total	≤ __ *512 channels

Ethernet / Management
 RJ45 socket, (10/100/1000 Base-TX)

- System integration
- Pharos Cloud
- Scale with Pharos devices
- Commissioning

Audio output
 Left + Right cinch connector
 SPDIF cinch connector


- To audio system

Mains input
 IEC connector. UK, EU and US cable included

- From mains power installation
- 100-240V AC 50-60Hz 0.8-0.4A
- 80W typical, 200W maximum

RS232
 DB9 connector

- System integration

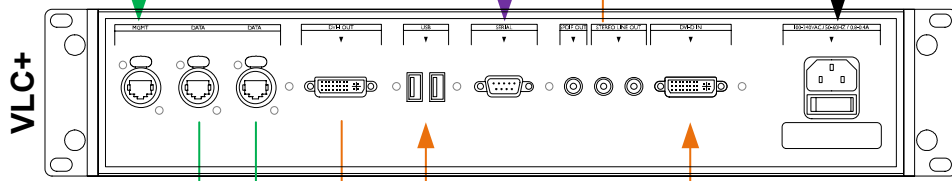

Ethernet / Data
 1xRJ45 socket (10/100/1000 Base-TX)
 1xRJ45 socket (future development)

- eDMX output to lighting

USB
 For service use only


DVI-D Input
 DVI-I connector, only DVI-D supported

- For live video input

DVI-I Output
 DVI-I connector

- To DVI-I compatible fixtures
- To preview monitor

- Consult the **Installation Guide** for technical details
- See **General Notes.pdf** for information on cabling types
- Contact your supplier, visit our website or mail support with any other questions

 pharoscontrols.com	Reference: 0006	Name: VLC+ interfaces		
	Size: A4	Date: 27/09/2016	Rev: V 1.0	Notes: Setup
	Page: 1 of 1	17/09/2018	V 1.1	Minor adjustments
		21/01/2019	V 1.2	Minor adjustments